

# PERFORMANCE RESULTS

## BIOROCK<sup>®</sup>

Zone d'activités économiques Robert Steichen  
5 Rue Bommel, L-4940 Hautcharage, Luxembourg

### EN 12566-3+A2

Small wastewater treatment systems for up to 50 PT  
Part 3 : Prefabricated septic tanks  
Small wastewater treatment plants up to 50 PE

Model : BIOROCK-S (6 PE)


Nominal organic daily load	0,325	Kg/d
Nominal hydraulic daily load	0,9	m <sup>3</sup> /d
Treatment efficiency	COD	93,3 %
	BOD <sub>5</sub>	97,8 %
	SS	97,9 %
Electrical consumption	0	kWh/j

Watertightness test	No leaks were found	Result : good
Structural behavior « annex D.6 – Pit test »	Ground water was simulated to the top of the plant	Result : good

Certipro,  
Afdeling van Vito nv  
Notified Body 1476  
Boeretang 200  
B-2400 Mol  
Belgium



Mol,  
2014-12-12  
Peter Peeters

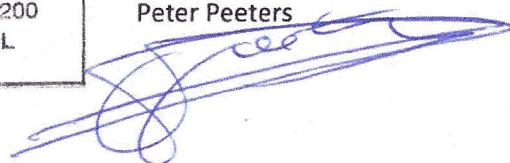

This document replaces neither the CE-marking, nor the declaration of conformity.

